



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/20, 7/34, 7/32	A3	(11) International Publication Number: WO 96/21998
		(43) International Publication Date: 18 July 1996 (18.07.96)

(21) International Application Number: PCT/FI96/00007

(22) International Filing Date: 3 January 1996 (03.01.96)

(30) Priority Data:
950047 4 January 1995 (04.01.95) FI(71) Applicant (for all designated States except US): NOKIA
TELECOMMUNICATIONS OY [FI/FI]; Mäkkylä puisto
1, FIN-02600 Espoo (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): POSTI, Harri [FI/FI];
Torikatu 33 D 8, FIN-90100 Oulu (FI).(74) Agent: OY KOLSTER AB; Iso Roobertinkatu 23, P.O. Box
148, FIN-00121 Helsinki (FI).(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY,
CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS,
JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD,
MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD,
SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN,
ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent
(AZ, BY, KZ, RU, TJ, TM), European patent (AT, BE, CH,
DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE),
OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR,
NE, SN, TD, TG).**Published***With international search report.**Before the expiration of the time limit for amending the
claims and to be republished in the event of the receipt of
amendments.*(88) Date of publication of the international search report:
12 September 1996 (12.09.96)

(54) Title: RADIO SYSTEM FOR CORDLESS SUBSCRIBER LINE INTERFACE

(57) Abstract

The invention relates to a wireless local loop system comprising base stations and an access network node which connects the cordless terminal equipments (T) to the exchange of the fixed network. The air interface between the cordless terminal equipment (T) and the base station (2, 3) is mainly in accordance with the GSM mobile system. In addition to the base station, the terminal equipment (T) also measures the field strength and quality of the radio channel. There are at least two measurement periods during a multiframe of a traffic channel (TCH), and the terminal equipment transmits the measurement results of the first measurement period in a single burst in a time slot of a slow associated control channel (SACCH) and the measurement results of the second measurement period in a single burst in a time slot of an IDLE frame. There are at least two transmissions of control information during the multiframe, and the base station transmits the first control information in a single burst in a time slot of the SACCH and the second control information in a single burst in a time slot of the IDLE frame. In this manner the measurement period can be made shorter than the frequency of the Rayleigh fading.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 96/00007

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04Q 7/20, H04Q 7/34, H04Q 7/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04B, H04J, H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC, PAJ, WPI

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	MOULY, Michel and PAUTET, Marie-Bernadette, "The GSM system for Mobile Communications", published by the Authors: M. MOULY et Marie-B. PAUTET, 49, rue Louise Bruneau, F-91120 PALAISEAU, FRANCE, page 342 - page 346, page 420 - page 421 --	1-4
Y	IEEE Transactions on Vehicular Technology, Volume 40, No 2, May 1991, David J. Goodman, "Second Generation Wireless Information Networks", page 368 - page 369; page 371 - page 373, figure 2 --	1-4

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

5 July 1996

Date of mailing of the international search report

09-07-1996

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Marcus Wik
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 96/00007

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2236454 A (PHILIPS ELECTRONICS AND ASSOCIATED INDUSTRIES LIMITED), 3 April 1991 (03.04.91), see whole document --	1-4
P,A	WO 9509512 A1 (NOKIA TELECOMMUNICATIONS OY), 6 April 1995 (06.04.95), claims 7,10, abstract, page 1 -----	1-4

INTERNATIONAL SEARCH REPORT
Information on patent family members

01/04/96

International application No.
PCT/FI 96/00007

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
GB-A-	2236454	03/04/91	AU-B-	649959	09/06/94
			AU-A-	6195290	07/03/91
			CA-A-	2024216	02/03/91
			EP-A,A,A	0415502	06/03/91
			JP-A-	3093328	18/04/91
			US-A-	5212684	18/05/93

WO-A1-	9509512	06/04/95	NONE		

Page Blank (uspto)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q	A2	(11) International Publication Number: WO 96/21998 (43) International Publication Date: 18 July 1996 (18.07.96)
<p>(21) International Application Number: PCT/FI96/00007</p> <p>(22) International Filing Date: 3 January 1996 (03.01.96)</p> <p>(30) Priority Data: 950047 4 January 1995 (04.01.95) FI</p> <p>(71) Applicant (<i>for all designated States except US</i>): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Mäkkylän puistotie 1, FIN-02600 Espoo (FI).</p> <p>(72) Inventor; and (75) Inventor/Applicant (<i>for US only</i>): POSTI, Harri [FI/FI]; Torikatu 33 D 8, FIN-90100 Oulu (FI).</p> <p>(74) Agent: OY KOLSTER AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AZ, BY, KZ, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>In English translation (filed in Finnish). Without international search report and to be republished upon receipt of that report.</i></p>
<p>(54) Title: RADIO SYSTEM FOR CORDLESS SUBSCRIBER LINE INTERFACE</p> <p>(57) Abstract</p> <p>The invention relates to a wireless local loop system comprising base stations and an access network node which connects the cordless terminal equipments (T) to the exchange of the fixed network. The air interface between the cordless terminal equipment and the base station (2, 3) is mainly in accordance with the GSM mobile system. In addition to the base station, the terminal equipment (T) also measures the field strength and quality of the radio channel. There are at least two measurement periods during a multiframe of a traffic channel (TCH), and the terminal equipment transmits the measurement results of the first measurement period in a single burst in a time slot of a slow associated control channel (SACCH) and the measurement results of the second measurement period in a single burst in a time slot of an IDLE frame. There are at least two transmissions of control information during the multiframe, and the base station transmits the first control information in a single burst in a time slot of the SACCH and the second control information in a single burst in a time slot of the IDLE frame. In this manner the measurement period can be made shorter than the frequency of the Rayleigh fading.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

Radio system for cordless subscriber line interface

5 The invention relates to a wireless local loop system comprising base stations and an access network node which connects the cordless terminal equipments to the exchange of the fixed network. The system especially comprises an air interface between the cordless terminal equipment and the base station, the interface being mainly in accordance with the GSM mobile system, wherein
10 a multiframe of a traffic channel TCH consists of 26 TDMA frames, at least one of which is a frame of a slow associated control channel (SACCH) in the time slot of which the terminal equipment (T) transmits measurement information to the base station and the base station
15 (BS) transmits control information to the terminal equipment, and one frame is an IDLE frame.

When a telephone network is being built, the installation of the subscriber lines between the exchange and the subscriber equipments is not only
20 considerably expensive but also requires a great deal of time. Usually the network of subscriber lines is formed in such a way that twin cables beginning in several subscriber equipments are supplied to a distribution frame, and cables originating in several
25 crossbar switches are combined in another distribution frame the cable of which is supplied to the exchange. The signalling interface between the exchange and the subscriber lines is standardized, and it is either an interface of two-wire analogous subscriber lines, a
30 multiplexer interface according to Recommendation V2 of the CCITT, or a message-based multiplexer interface according to Recommendation V5.1 of the ETSI. Altering fixed subscriber lines is troublesome, and maintenance costs especially in areas where the subscriber lines are
35 overhead lines can be considerable. A solution to these

problems is replacing the fixed lines between the exchange and the subscriber equipments with radio lines. The solution is known as a wireless local loop (WLL) system.

5 The principle of the WLL system is shown in Figure 1. A wireless stationary terminal equipment T comprises a radio unit 4 provided with an antenna, and a telephone adapter that connects a standard subscriber
10 equipment 5 to the terminal equipment. The subscriber equipment may be a normal telephone set, a telefax terminal, or a modem. It is attached to the terminal equipment by inserting a standard plug in the adapter connection of the terminal equipment. The user utilizes
15 the subscriber equipment 5 in the same way as in a conventional fixed network, even though the subscriber line connection consists of a radio line between the terminal equipment T and the base station BS 2 or 3. The base station may serve several subscriber equipments. The base station is connected to a special access
20 network node 1, which in turn is connected to a standard exchange. Several base stations may be connected to one access network node 1.

 The WLL system may be built by using components of an existing mobile phone system. The mobile system
25 may be for example an analogous NMT system or a digital GSM system. In such a case, the signalling of the WLL system is in accordance with the system concerned, the base stations are standard base stations of this system, and the radio unit of the terminal equipment is similar
30 to the radio unit of the mobile station or the terminal equipment may be a mobile station in a mobile system. An important component in the WLL system is the access network node that connects the subscribers to the standard local exchange. The access network node
35 converts the WLL network signalling, for example NMT or

GSM signalling, into signalling suitable for the fixed network (e.g. PSTN), and correspondingly it adapts the signalling of the fixed network to the WLL network interface.

5 The network node is connected to the local exchange with an open V2- or V5.1-type multiplexer interface that utilizes a 2 Mbit/s PCM system. If the local exchange only supports the two-wire interface, the network node is connected to the exchange by converting
10 the V2 signalling into an analogous two-wire subscriber loop interface by means of a multiplexer. The signalling between the network node and the base stations connected thereto is the signalling of an adapted mobile network, but it is modified in such a way that the functions,
15 such as cell handover and roaming, typical of the cellular network are, prevented. Therefore, the subscriber must remain within the coverage area of the base station assigned to it. The routing of an incoming call and an outgoing call is based on the subscriber
20 database of the network node. The operation of the network node corresponds to the operation of a concentrator: a call is forwarded from a subscriber interface to the exchange, and the analysis of the numbers, calculation and other functions are performed
25 in the exchange.

 According to what is described above, a WLL network may be based on a known GSM system. The GSM is a digital cellular system based on time division multiple access. The channels of the system will be
30 described below.

 Logic channels are divided into traffic channels TCH that transmit speech and data, and into control channels that forward signalling and synchronization data. Traffic channels include a full
35 rate traffic channel TCH/F and a half rate traffic

channel TCH/H. The full rate traffic channel is always allocated together with a slow associated control channel SACCH. Therefore one carrier wave can be used to form eight TACH/F channels when all the time slots of the TDMA frame are allocated to traffic channels.

The TCH/F+SACCH/TF multiframe shown in Figure 2 comprises 26 successive frames, in which the TCH/F cycle of 26 time slots comprises 24 time slots in which the TCH/F burst is transmitted, one time slot in which the SACCH burst is transmitted, and one time slot, IDLE, in which no transmission occurs. According to the figure, the SACCH burst is transmitted in the time slot of frame 12, and no transmission occurs in the time slot of frame 25 IDLE.

A mobile station utilizes the SACCH for forwarding different measurement results to the base station. The base station transmits commands related to power control and timing advance to the mobile station on the control channel. Further, the base station transmits general network information, so-called system_infos 5 and 6. This information contains a list of frequencies of neighbouring cells to be monitored, the base station identity code BSIC, the BCCH frequency data, parameters relating to interference control of the radio line, etc. The information is also transmitted on the broadcast control channel (BCCH). The SACCH message contains a so-called Layer 1 Header wherein the timing advance and power control commands are transmitted in the downlink direction, and acknowledgment of the aforementioned commands is forwarded in the uplink direction.

The mobile station and the base station must measure the power of the signal they have received, and the mobile station must also measure the power of the BCCH carrier of the neighbouring base stations. The

quality of the received signal is also measured by calculating the bit error ratio. The mobile station must report the results of the measurement to its own base station. It reports them on the aforementioned SACCH. According to the GSM recommendation, the measurement results must be reported at least once a second. This means that the cycle of measurement and reporting contains four multiframes, 480 ms in time, during which the measurements are performed, and another four multiframes, 480 ms in time, during which the measurement results are transmitted. If the SACCH is only utilized for reporting, the mobile station can report the measurement results twice a second. The measurement and reporting cycle contains four multiframes, wherefore the results are transmitted every 480 ms. The mobile station manages to perform the decoding of the BCCH signal of the neighbouring cells only during the time slot of the last, i.e. idle, frame in the multiframe (Figure 2).

The base station uses the measurement results for controlling both the power of its own transmitter and the power of the mobile station, for providing the mobile station with the timing advance, and for handover purposes. The purpose of power control both in the uplink and downlink direction is, firstly, to improve the efficiency of the frequency spectrum by decreasing the power of the transmitters as much as possible during the connection while maintaining a good connection quality, and secondly, to increase the battery life of the mobile station.

In a mobile system, obstacles over the radio path result in the arrival of several reflected signals at the receiver, causing thus changes in the amplitude. This phenomenon is known as Rayleigh fading, since the amplitude of the sum of several signals with a random

distribution of phases is Rayleigh-distributed. Due to the Rayleigh fading, an additional margin is required at the level of the transmission since the power control of the transmitter cannot follow rapid changes in the signal level.

The additional power that is required for compensating for the Rayleigh fading and that is added to the transmissions of both the mobile station and the base station is problematic, since the interference increases disturbance in the reception of the other users, thus decreasing the network capacity. The additional transmit power also decreases the battery life of the mobile station. The aforementioned problems concern both the GSM system and the WLL system based thereon.

The purpose of the present invention is to provide a wireless local loop system by means of which the Rayleigh fading does not have to be compensated for with additional transmit power and in which the power control is so fast that it manages to follow the changes of signal amplitude caused by the Rayleigh fading.

This objective is achieved with the wireless local loop system according to the characterizing part of claim 1.

According to the invention, power control is accelerated by utilizing both SACCH frames and IDLE frames for transmitting measurement results and power control commands. The measurement report and the power control command are transmitted in a single burst.

In the following, the invention will be described in greater detail with reference to the accompanying drawings, in which

Figure 1 shows the principle of the WLL system, Figure 2 shows a multiframe of a traffic channel.

5 In WLL applications, a subscriber may move
within his home cell, but intercell handover is
prevented. This decreases considerably the need of the
mobile station for measurement. It is useless for the
10 mobile station to measure the strength of the BCCH
carrier of the neighbouring stations, and therefore the
calculation required for the measurements is not
required either. The base station concerned therefore
does not have to transmit information, so-called
15 system_infos 5 and 6, concerning the neighbouring base
stations to the mobile station, since this information
is already transmitted on the BCHH.

 Another typical feature of the WLL application
is that the subscriber equipment is mostly stationary
15 or moves only slowly. Therefore the Rayleigh fading is
very slow.

 Since the measurements relating to intercell
handover and the measurement reporting are not required,
the power control cycle can be accelerated so much that
20 it is more rapid than the frequency of the Rayleigh
fading. The remaining measurements to be performed are
normal measurements according to the GSM recommendation,
concerning the connection between a subscriber equipment
and a base station. When the measurement results are
25 forwarded to the base station and the base station gives
the power control commands in the manner according to
the invention described below, the power control cycle
can be decreased to nearly a tenth of the cycle of the
GSM system.

30 Due to the decreased measurement need, the
length of the measurement report transmitted to the base
station by the terminal equipment can be reduced so that
the measurement results can be transmitted in a single
burst. The channel-coded 456-bit block is transmitted

in four bursts, wherefore the burst of the measurement results uses 114 bits.

5 There are two measurement periods during the multiframe, the measurement report of the first measurement period being transmitted during the SACCH frame of the multiframe, and the second report being transmitted in the IDLE frame. The same measurements are performed during each measurement period. The IDLE frame can be used since the measurements of the neighbouring
10 base stations do not have to be processed during the IDLE frame as in the GSM system. Therefore, two measurement result bursts can be transmitted during the multiframe. The length of the multiframe is 120 ms, wherefore the measurement results can be transmitted in
15 the uplink direction every 60 ms. The rate is significant, considering that in the GSM system the measurement results are transmitted every 500 ms.

The multiframe of the system according to the invention comprises in fact two SACCH frames and no IDLE
20 frame, whereupon the structure is as shown in Figure 2, except that frame 25 "IDLE" is changed to a SACCH frame.

The base station receives the measurement report, calculates the power control need and possibly the timing advance value on the basis of the report, and gives the power control command (and, if required, the timing advance command) to the terminal equipment. The
25 SACCH frame and the IDLE frame of the multiframe are used for transmitting the command in the downlink direction. Therefore the base station can always provide a command message in response to a measurement report transmitted by a terminal equipment. The command
30 messages are thus transmitted every 60 ms. Since the system_info 5 and 6 messages related to the network are not transmitted at all, there is additional space

available in the message. This space can be utilized by protecting the command message with additional coding.

With the system according to the invention, the power control cycle of measurement, report, analysis and power control command can be reduced to such an extent that the effect of the Rayleigh fading can be effectively compensated for. Therefore the additional transmit power used as a result of the Rayleigh fading can be minimized.

The system suggested above requires some changes in the standard GSM system. The SACCH must be respecified due to the use of the IDLE frame. The control message transmitted by the base station on the SACCH must also be edited. The functions must be changed in such a way that the access network node does not perform the handover algorithm and that no kind of measurement on the neighbouring cells or reporting of the measurement results are performed. The base station does not transmit the system_info 5 and 6 messages on the SACCH.

It must be understood that the above description and the figures related thereto are only intended to illustrate the present invention. Different variations and modifications of the invention will be evident for those skilled in the art without deviating from the scope and spirit of the invention disclosed in the appended claims.

Claims

5 1. A wireless local loop system comprising base
stations and an access network node which connects the
cordless terminal equipments (T) to the exchange of the
fixed network, the air interface between the cordless
terminal equipment and the base station (2, 3) being
10 mainly in accordance with a TDMA mobile radio system in
which the multiframe of the traffic channel TCH consists
of several TDMA frames, at least one of which is a frame
of a slow associated control channel (SACCH), in the
time slot of which frame the terminal equipment (T)
15 transmits measurement information to the base station
and the base station (BS) transmits control information
to the terminal equipment, and one frame is an IDLE
frame, c h a r a c t e r i z e d in that

 there are at least two measurement periods
during the multiframe, and the terminal equipment
20 transmits the measurement results of the first
measurement period in a single burst in a time slot of
the SACCH and the measurement results of the second
measurement period in a single burst in a time slot of
the IDLE frame,

25 there are at least two transmissions of control
information during the multiframe, and the base station
transmits the first control information in a single
burst in a time slot of the SACCH and the second control
information in a single burst in a time slot of the IDLE
30 frame,

 whereupon when the IDLE frame is used for
transmitting measurement results and control
information, said frame becomes a SACCH frame.

35 2. A system according to claim 1,
c h a r a c t e r i z e d in that both the first and

the second control information consist of a power control command in response to which the terminal equipment (T) adjusts its transmit power to correspond to the power defined in the command.

5 3. A system according to claim 2, characterized in that the power control command is protected with additional coding.

10 4. A system according to claim 1, characterized in that the control information contains the timing advance value.

Page Blank (uspto)

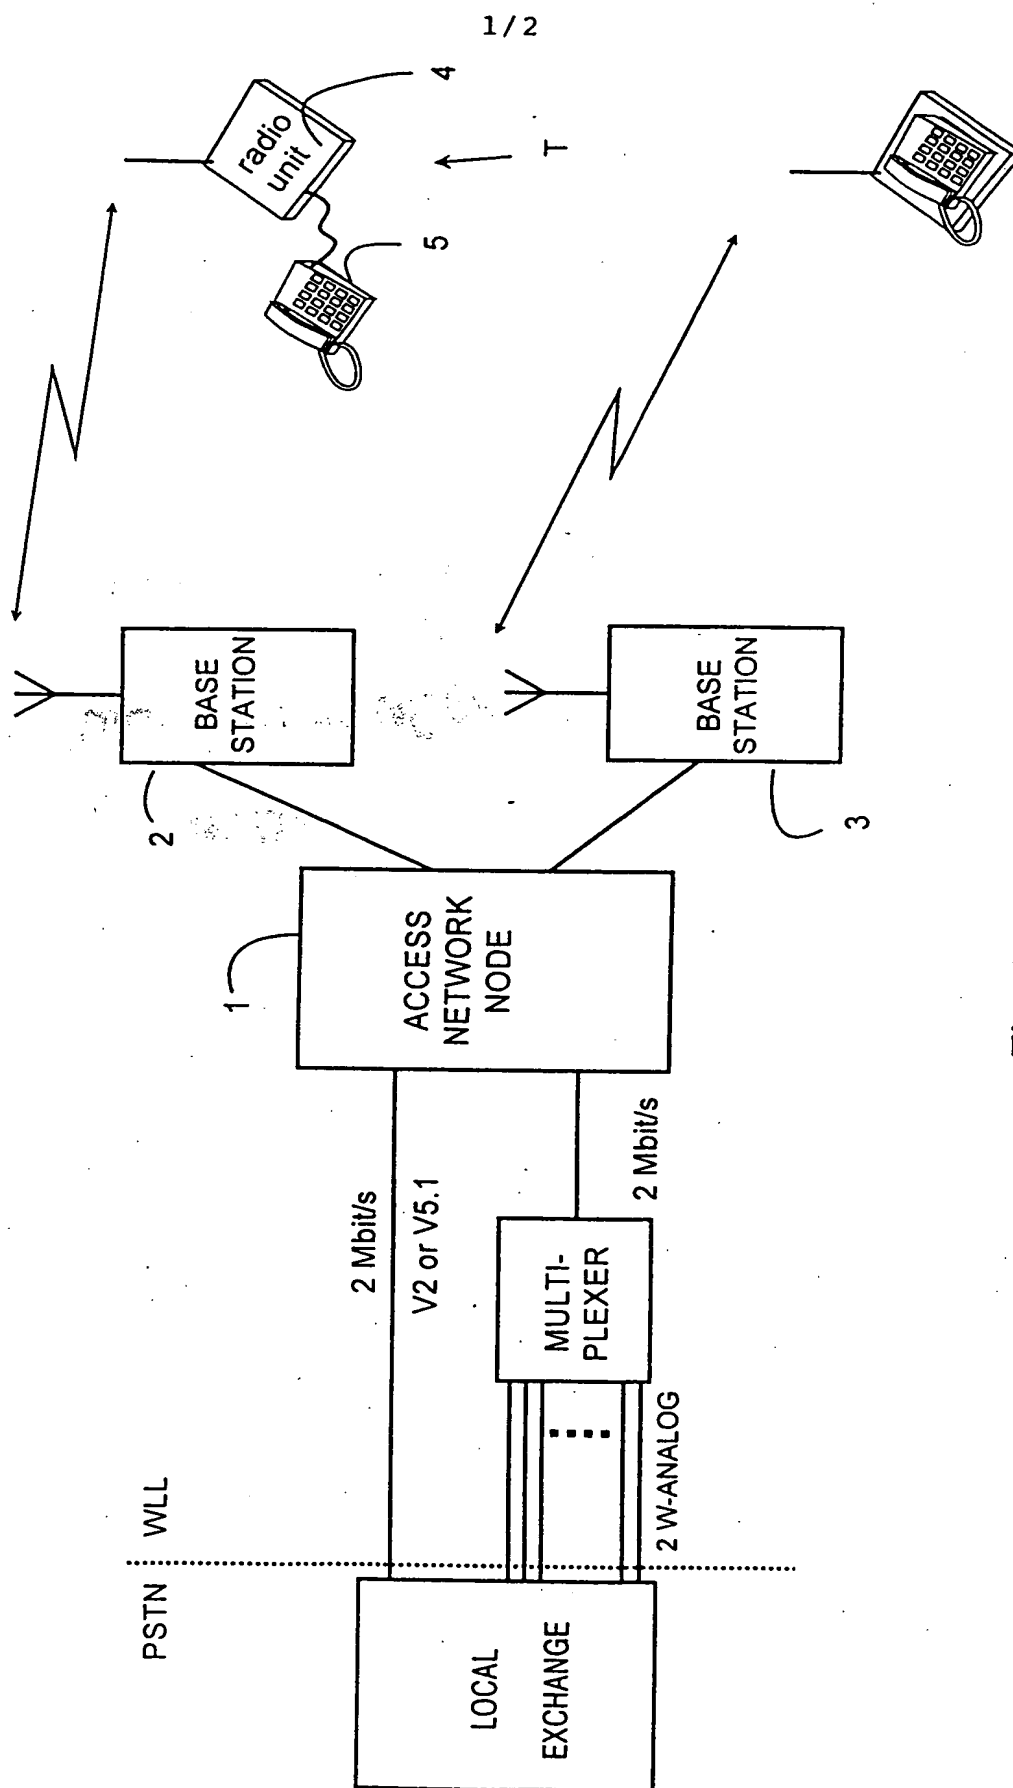


Fig. 1

This Page Blank (uspto)

TCH/F + SACCH/TF MULTIFRAME

IDLE	25
TCH/F	24
TCH/F	23
TCH/F	22
TCH/F	21
TCH/F	20
TCH/F	19
TCH/F	18
TCH/F	17
TCH/F	16
TCH/F	15
TCH/F	14
TCH/F	13
SACCH/TF	12
TCH/F	11
TCH/F	10
TCH/F	9
TCH/F	8
TCH/F	7
TCH/F	6
TCH/F	5
TCH/F	4
TCH/F	3
TCH/F	2
TCH/F	1
TCH/F	0

Fig. 2

This Page Blank (uspto)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspto)